



TECHNICAL DATA

MASSES

Transport mass 21 t

DIMENSIONS

Transport length 10.62 m

Transport width 2.55 m

Transport height 3.10 m

Front ramp angle 12°

MATERIAL HOPPER

Capacity 7 m³ (15 t)

TRACTION

Operating speed, max 25 m/min

Transport speed, max 4 km/h

ENGINE

Manufacturer/Model Cummins QSB 6.7-C220

Rated power, SAE J1995 164 kW (220 hp) @ 2200 rpm

Electrical system 24 V

Emissions according to EU Stage III /EPA Tier 3

Fuel tank capacity 300 l

ENGINE

Manufacturer/Model Cummins B 6.7-C225

Rated power, SAE J1995 168 kW (225 hp) @ 2200 rpm

Electrical system 24V

Emissions according to EU Stage V /EPA Tier 4f

Fuel tank capacity 360 l

CONVEYOR

Conveyor type Rubber belt on two chains, mounted with metal stiffeners

Conveyor speed Constantly variable

Conveyor width 1.20 m



Feeding height (max/min) 3.0 m /2.1 m

Feed capacity 4000 t/h

Feed capacity, optional swing conveyor 2000 t/h



DIMENSIONS

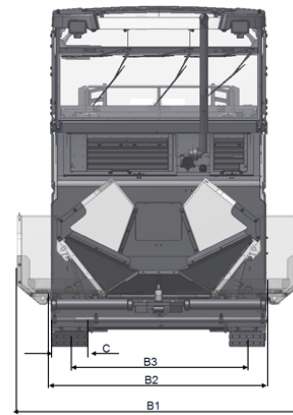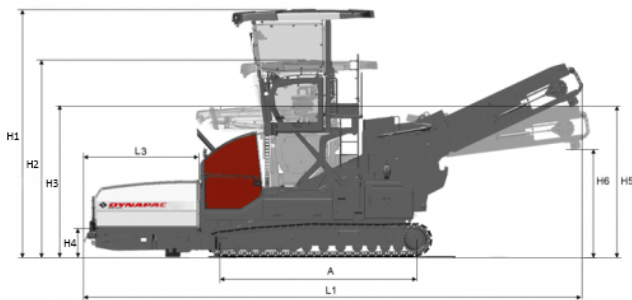

DIMENSIONS

A. Axle track	3.90 m
B1. Width, max.	3.35 m
B2. Width, standard	2.55 m
B3. Width, center of tracks	2.09 m
C1. Track width	320 mm
H1. Height, max.	5.02 m
H2. Height	4 m
H3. Height, transport	3.10 m
H4. Dumping height	570 mm
H5. Feeding height, max.	3.0 m
H6. Feeding height, min.	2.1 m
L1. Length	10.24 m
L3. Length, hopper	2.23 m

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.